




SH series pneumatic grippers



SHZ2 10D

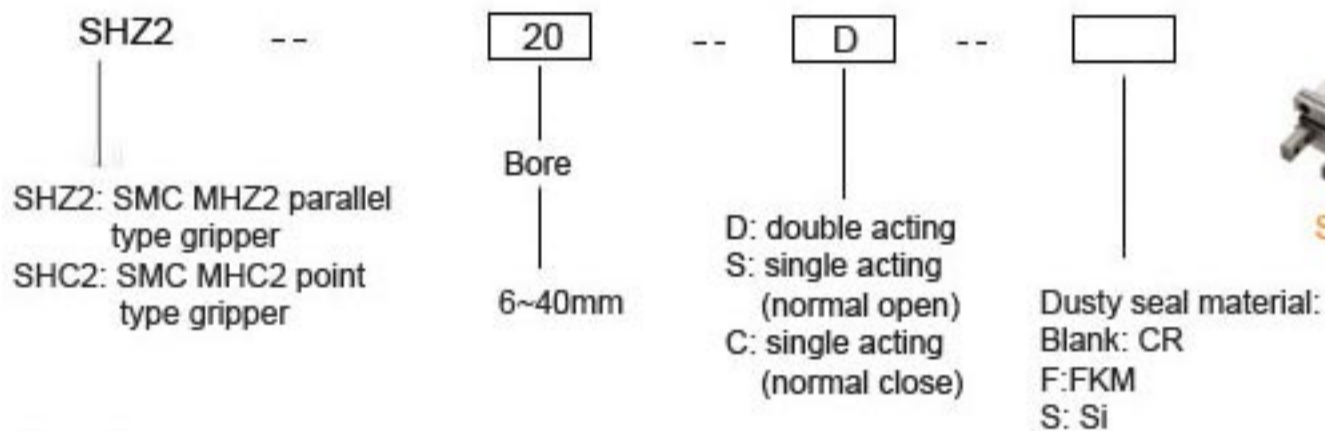

SHC2 16S

Order example:
 *SHZ2 type parallel type gripper, double acting, 20mm bore: SHZ2 20D
 *SHC2 type point type gripper, single acting normal open, 16mm bore: SHC2 16S

Features:

- *Complete linear guide rail guarantee high strength and precision
- *Variable built-in throttles make it easy to mount sensor switch
- *Different dusty cap materials are optional.

Specifications:

Cylinder Diameter (mm)		6	10	16	20	25	32	40
Working medium	Clean Air(25 micron filtration)							
Acting type	Double Acting							
	Single acting:Normal open/Normal close							
Max. pressure(Mpa)	0.7							
Maximum Working pressure (Mpa)	Double acting	0.15	0.2	0.1				
	Single acting	0.3	0.25					
Minimum Working pressure (Mpa)	0.2	0.15						
Medium Temperature(°C)	0- +60							
Max.acting frequency	+0.01						+0.02	
Lubrication	Not Required							
Magnet	always have							
Thread Size	M3X0.5			M3X0.8				