




SW Series Rodless cylinder (Φ6~Φ63)



WS Slide type

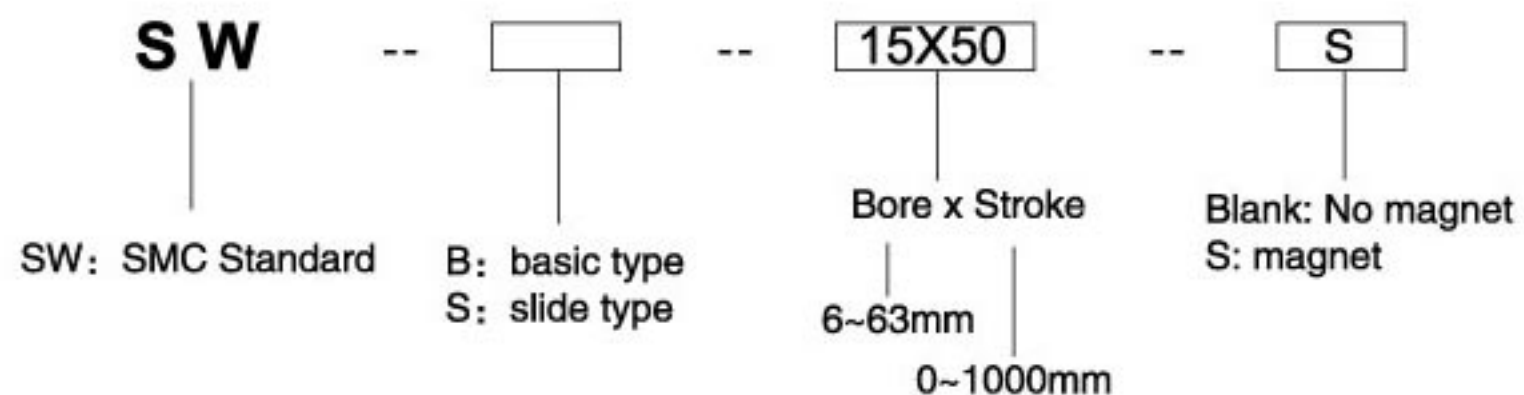

WB Basic type

※Specifications

Cylinder Diameter (mm)	6	10	15	25	32	40	50	63
Fluid	Air							
Acting Mode	Double-acting							
Ensured Pressure Resistance	1.05Mpa(10.5kgf/cm ²)							
Maximum Working-pressure	0.7Mpa(7.1kgf/cm ²)							
Minimum Working-pressure	0.18Mpa(1.8kgf/cm ²)							
Ambient and Medium Temperature	5-60°C							
Piston control	50-400mm/s							
*Cushion	With Rubber cushion at two sides							
Tolerance of stroke	0-250: $+1.0_0$, 251-1000: $+1.4_0$, 1001-: $+1.8_0$							
**Lubrication	Not Required							
Joint Tube Caliber	M5x0.8		PT 1/8			PT 1/4		

* With optional oil pressure shock absorber (only for the model -ECYIS with slide ruber)